




PCC H 7.5 6mm
GAS BLOWBACK RIFLE

SPECIFICATIONS:



Overall Length : 570mm / 650mm
Weight : 2050g
Magazine Capacity : 40Rds
Barrel Length : 7.5" / 190mm
Muzzle Velocity : 320 FPS
Caliber : 6mm BB

WARNING:


Always wear eye protective gear.
Always direct the muzzle towards a safe direction.
Always put the gun in a case or bag when you are carrying it.
Avoid pulling the trigger carelessly.
Keep out of reach of children.
Never aim or shoot a person or animal as a target.
Never look into the gun muzzle.
Never shoot the gun at places where people and car pass cross.
Please put away from your fingers from the trigger,
except when you are ready to shoot a target.

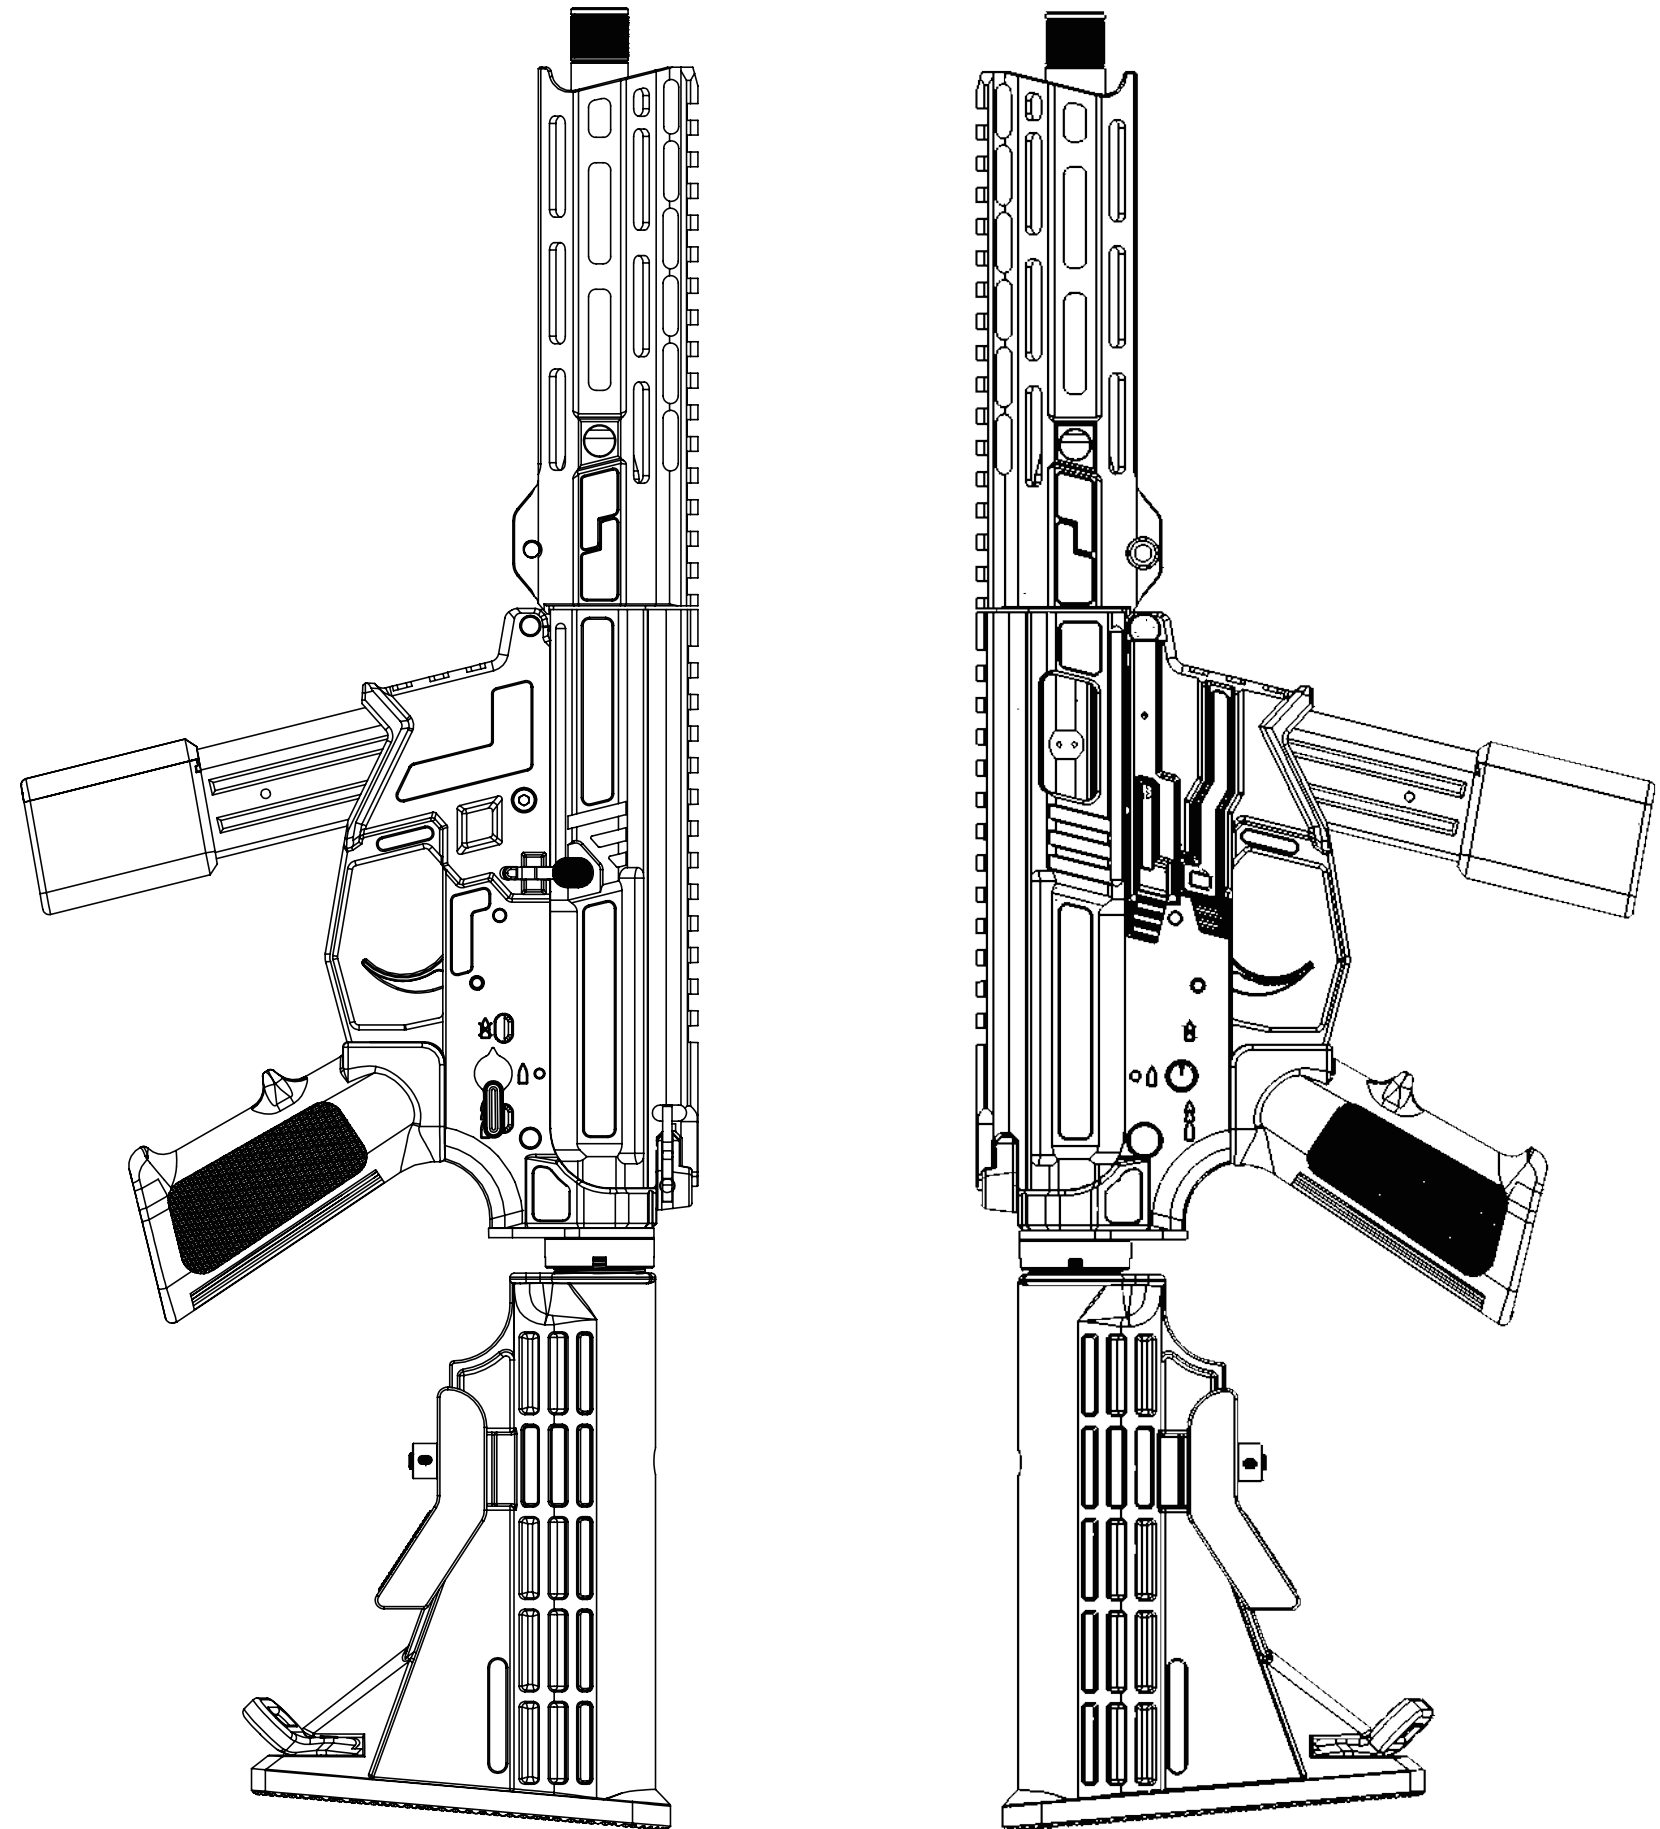


Pulling up the stock release lever to extend stock in multiple positions.

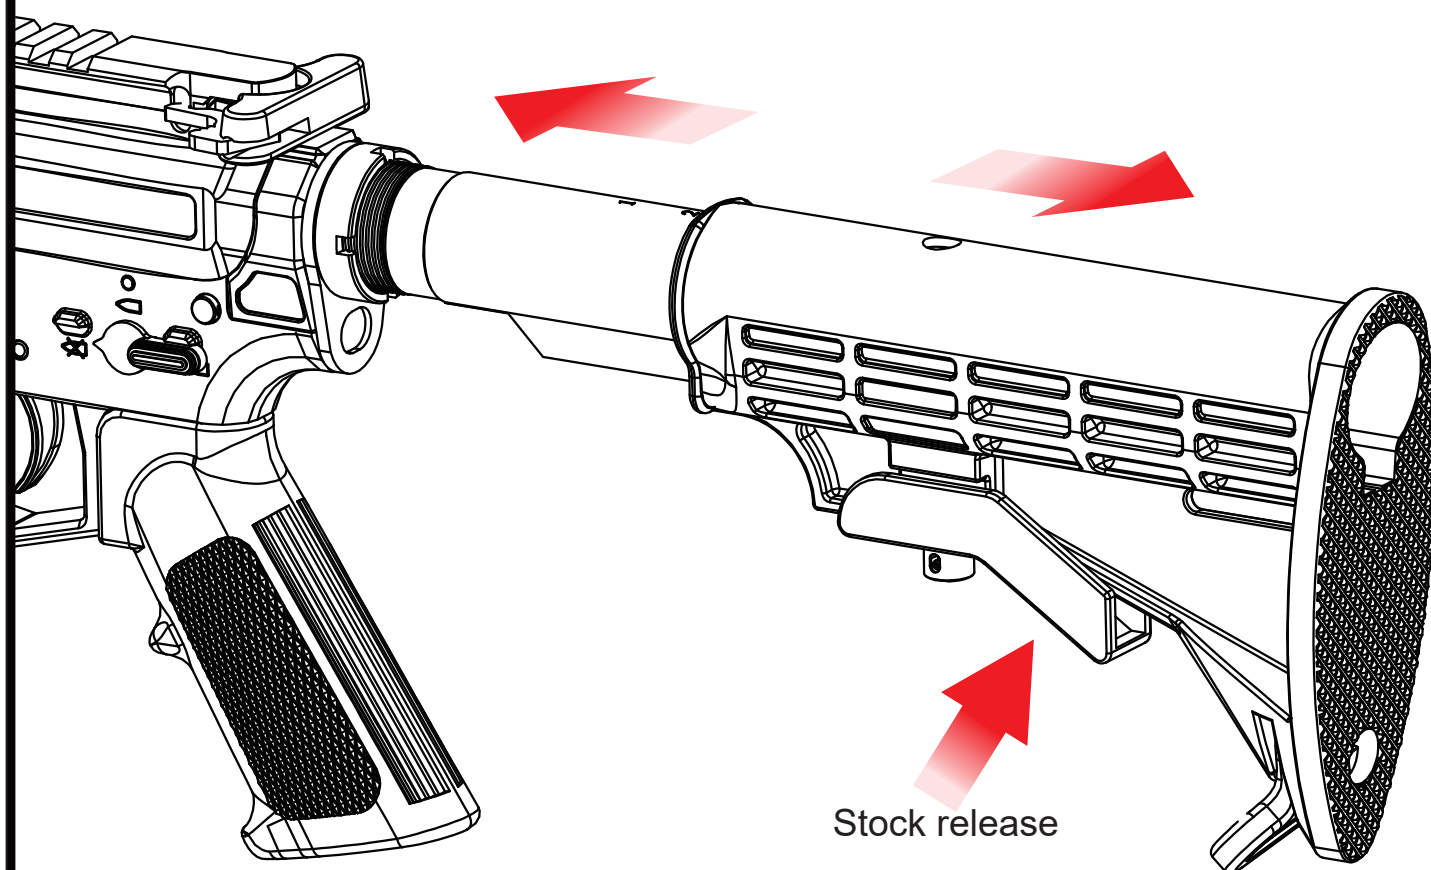

SAFE position indicates the trigger cannot be pulled.




SEMI position indicates one shot per trigger pull.





AUTO position indicates that the gun will continue firing bbs until the trigger is released or the magazine runs out of bbs.

2. Cocking the bolt, Select the firing mode, Ready to fires.

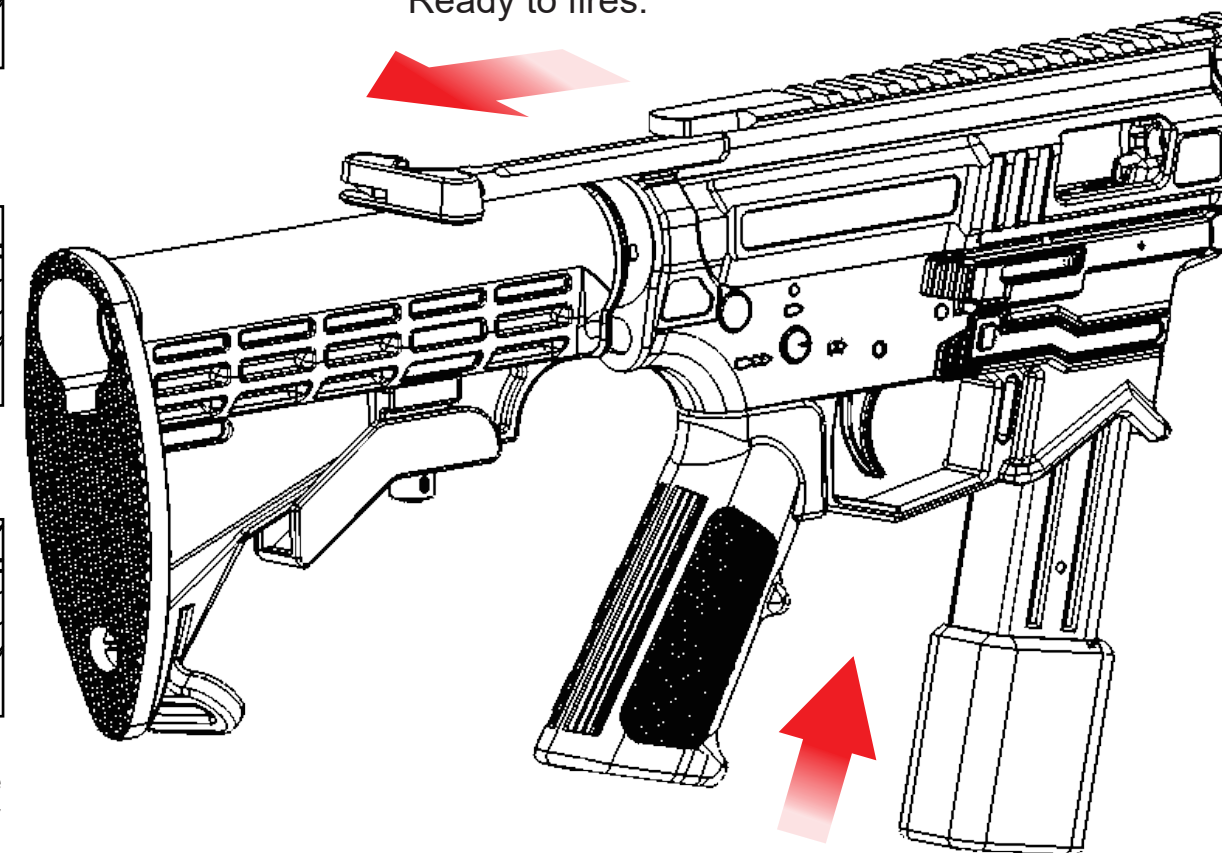


1. Load the magazine.


Insert a new magazine and press bolt release (A/B)

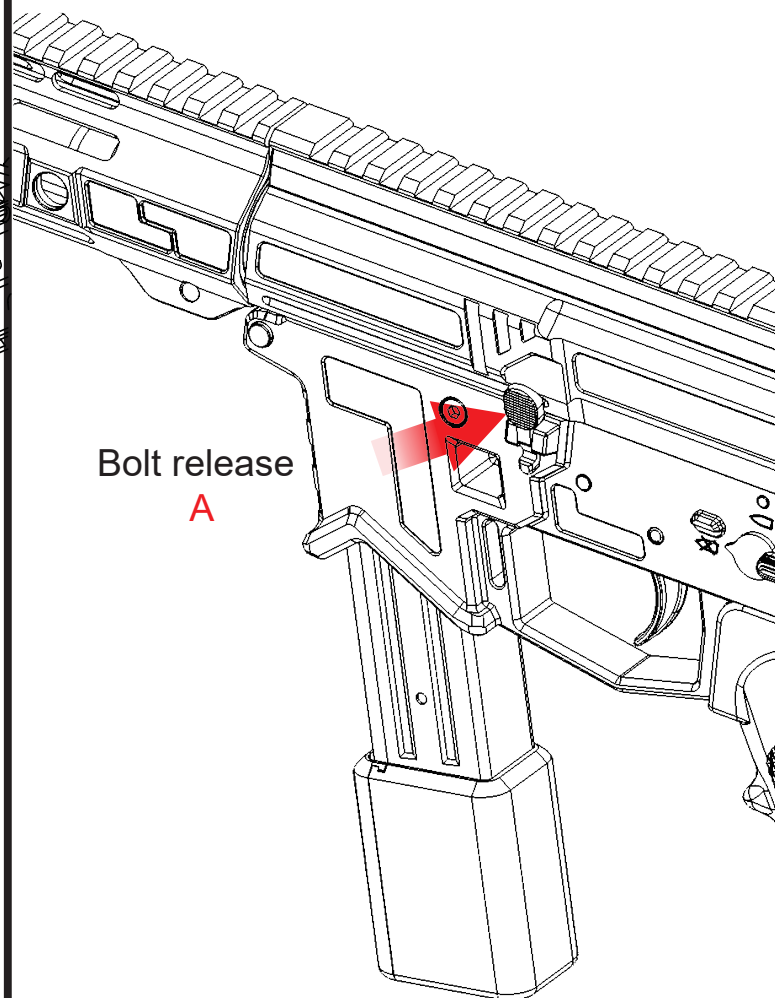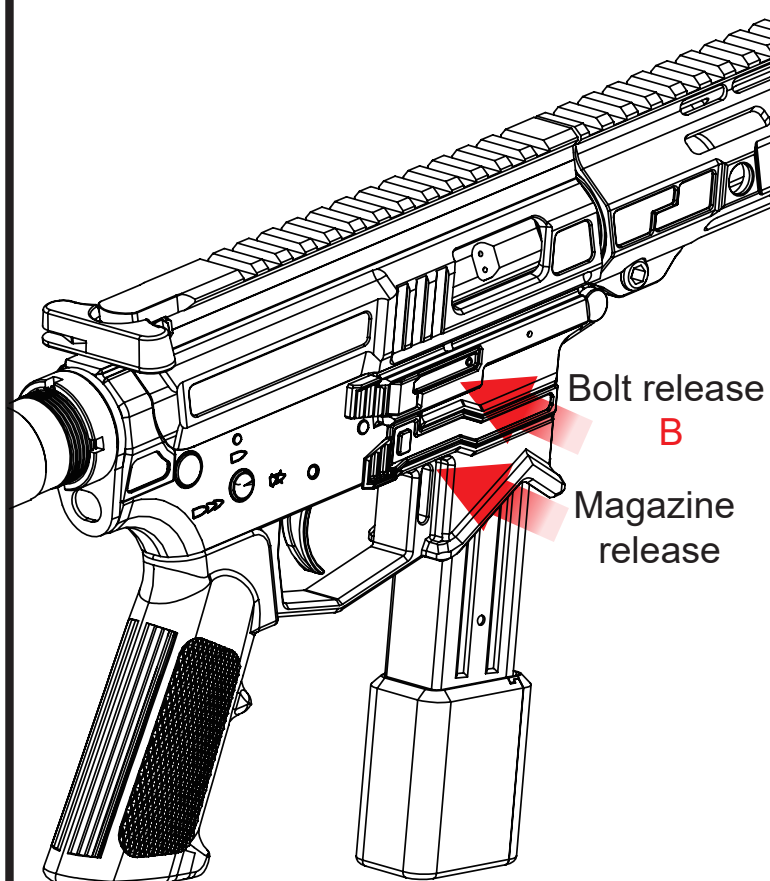


1. Filling the gas
PRESS 8-12 SEC

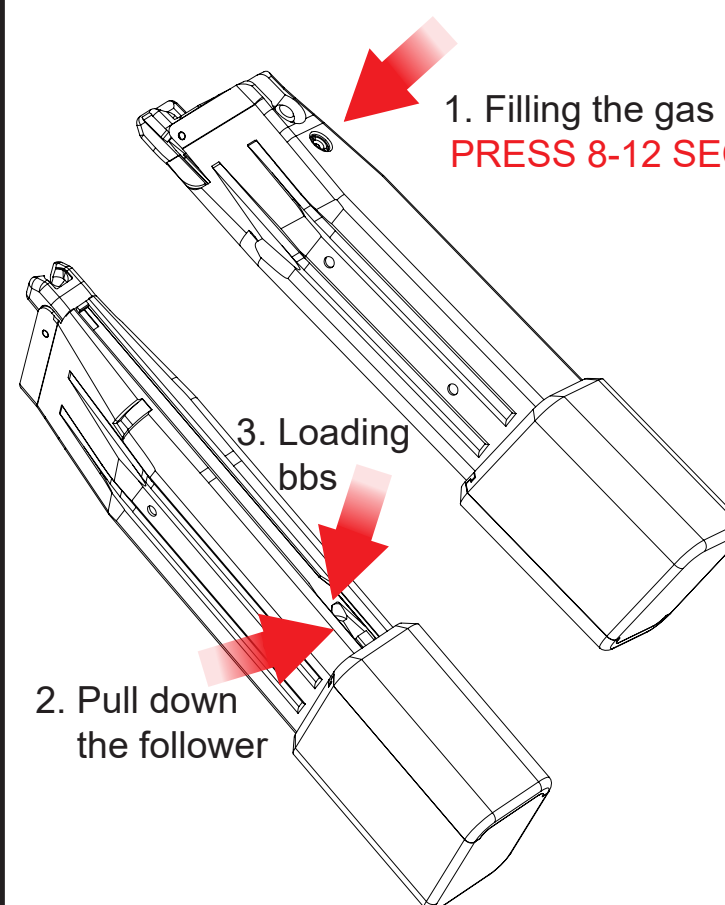

This HOP-UP system can be adjusted by using flathead screwdriver.

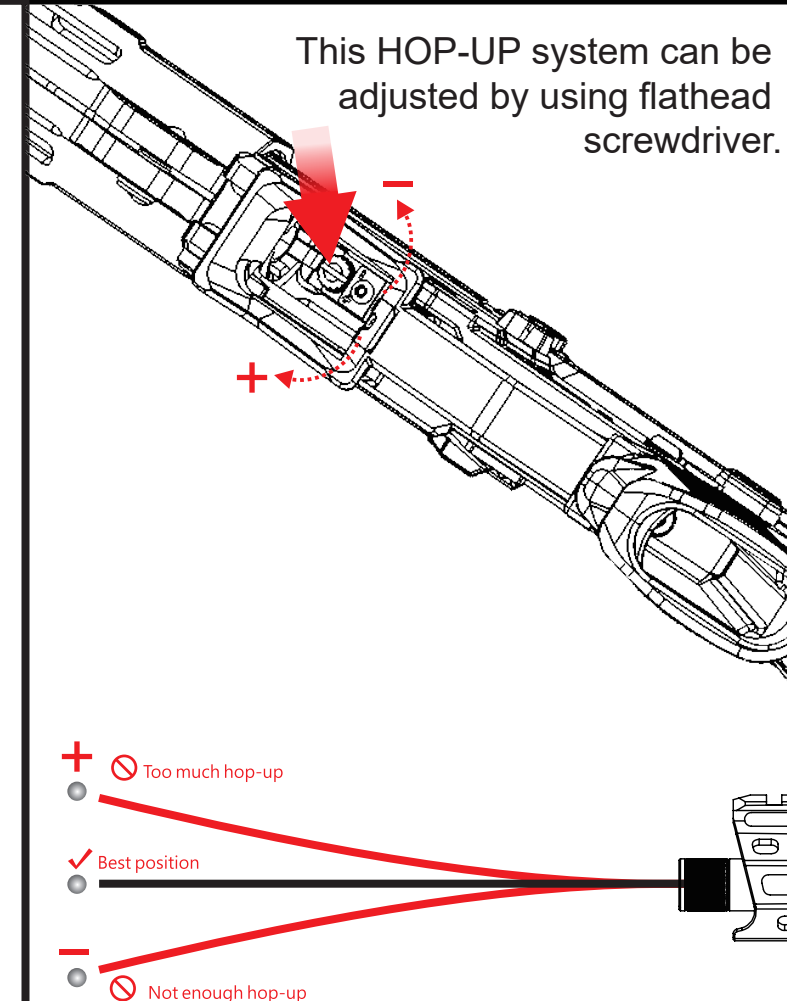


SA-PCC-H 7.5 Exploded View

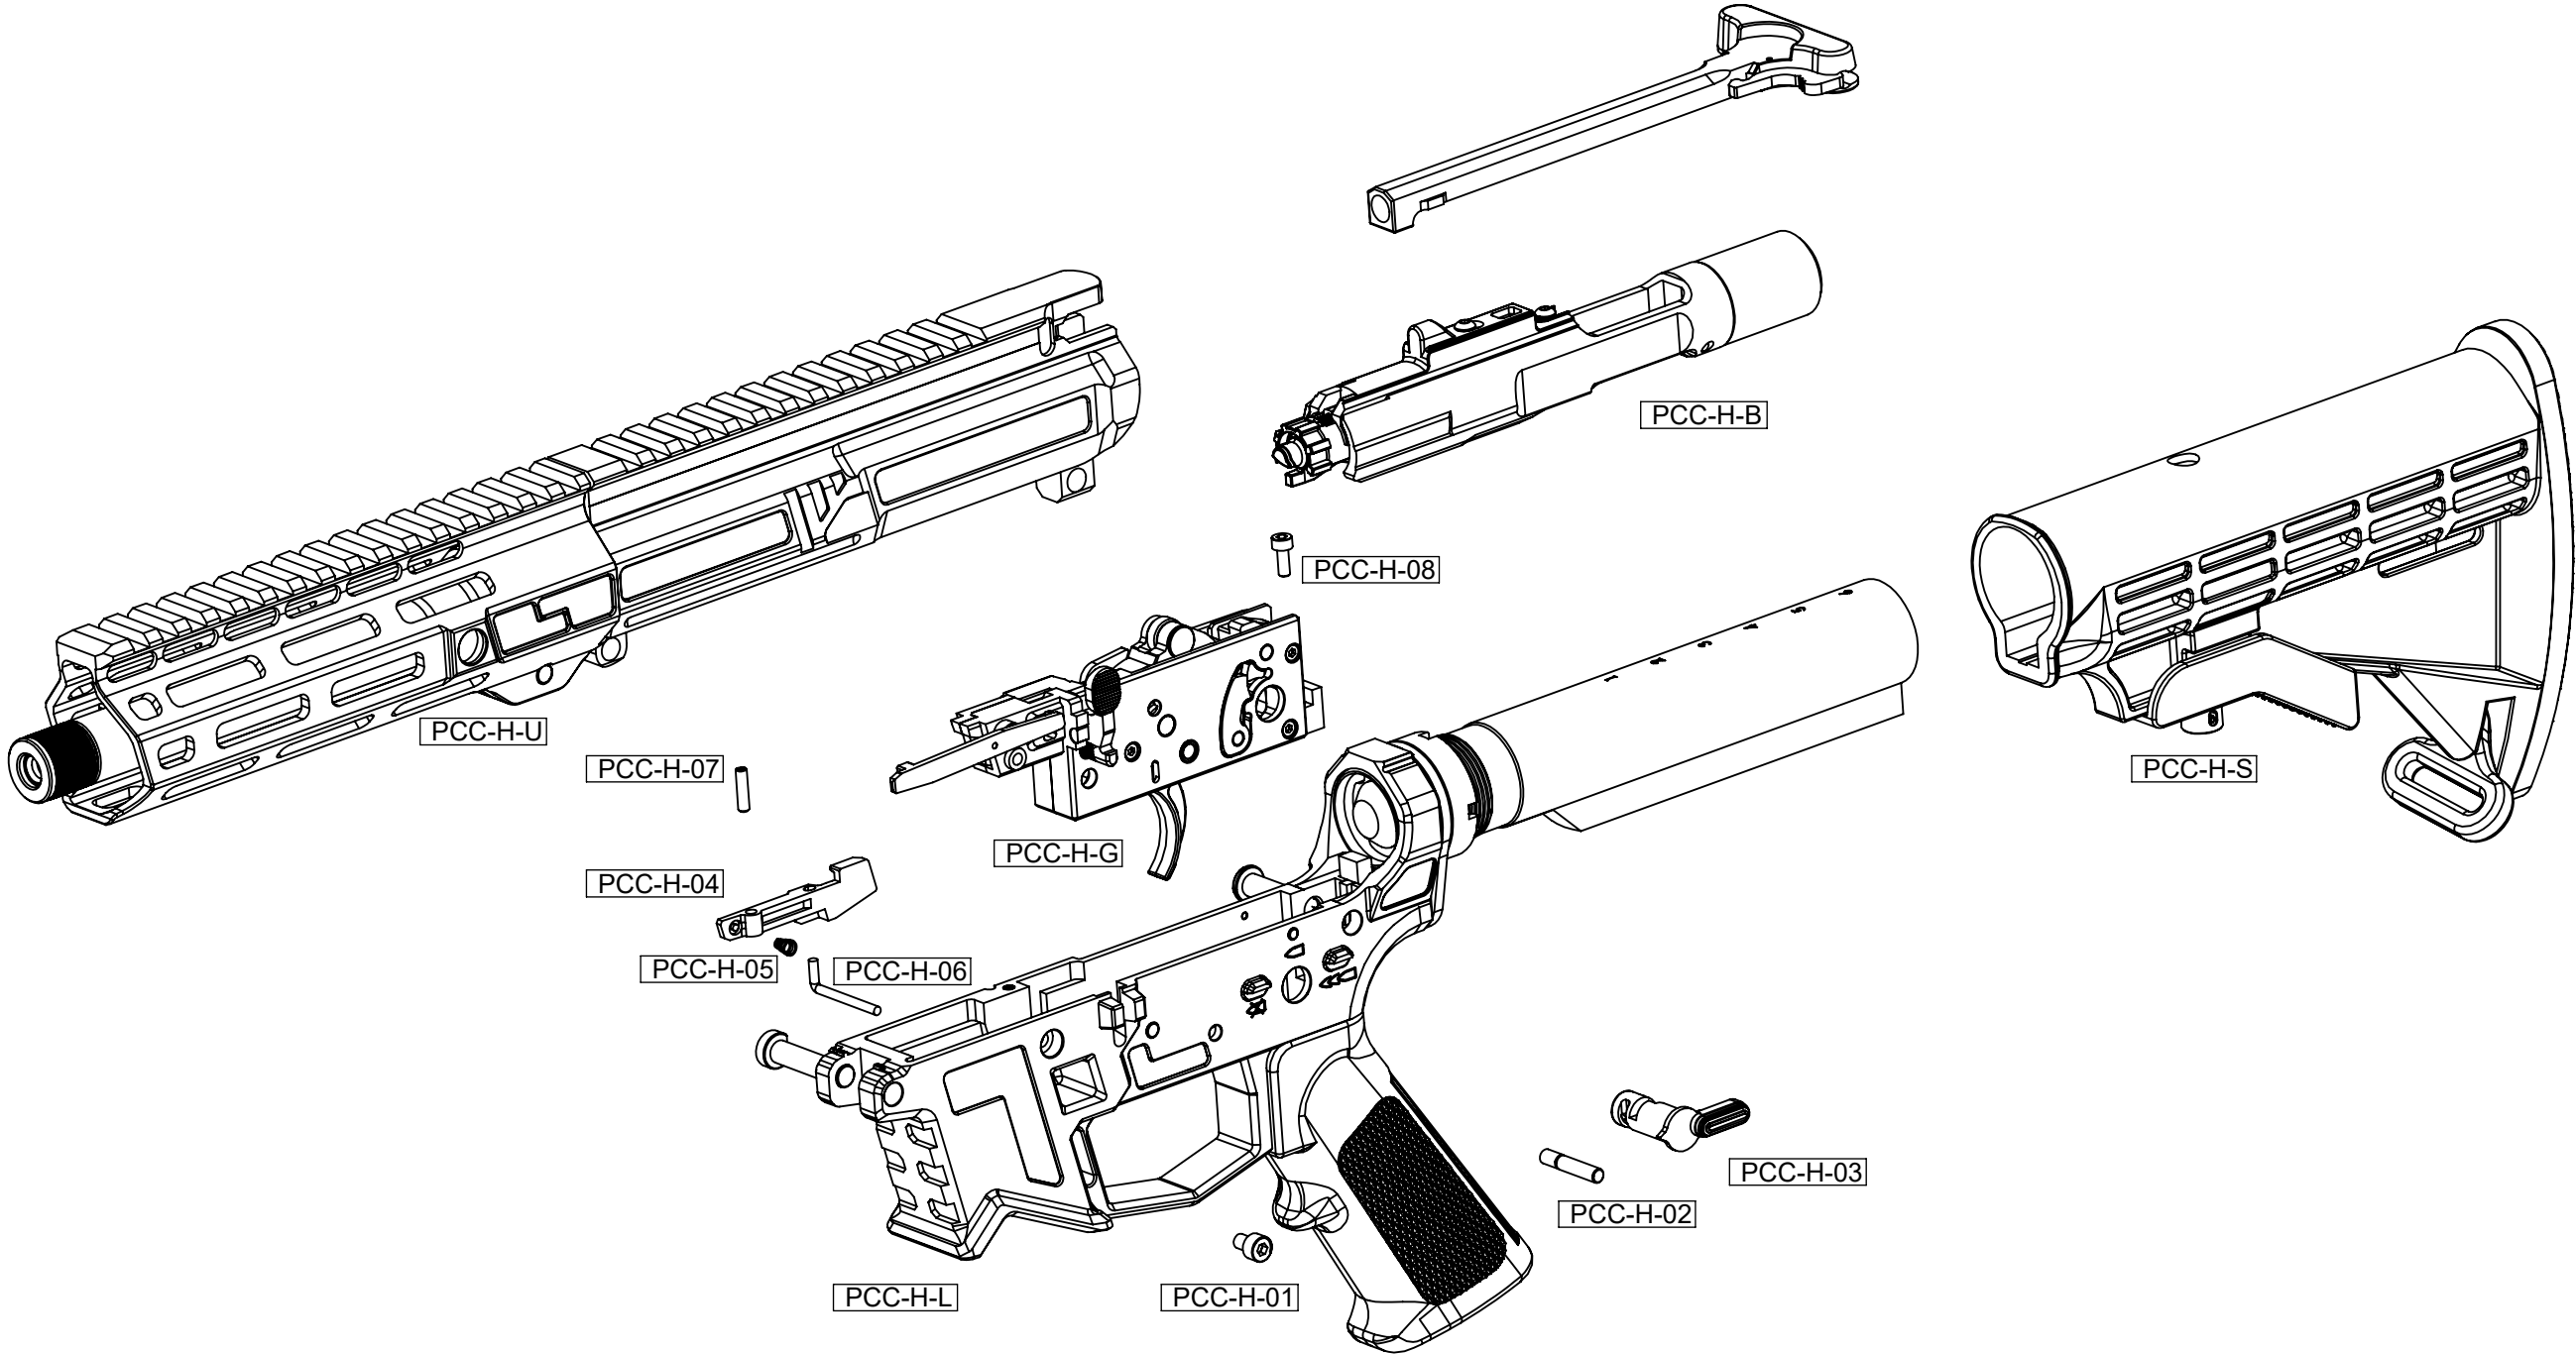


PCC-H-01	PCC-H-02	PCC-H-03	PCC-H-04	PCC-H-05	PCC-H-06	PCC-H-07	PCC-H-08
Trigger Box Receiver Front Screw M4 X 6	Receiver Trigger Pin	Selector	Bolt Release Right	Bolt Release Right Spring	Bolt Release Right Connect Pin	Bolt Release Right Screw M3 X 12	Trigger Box Receiver Rear Screw M3 X 8


SA-PCC-H Upper Receiver Exploded View

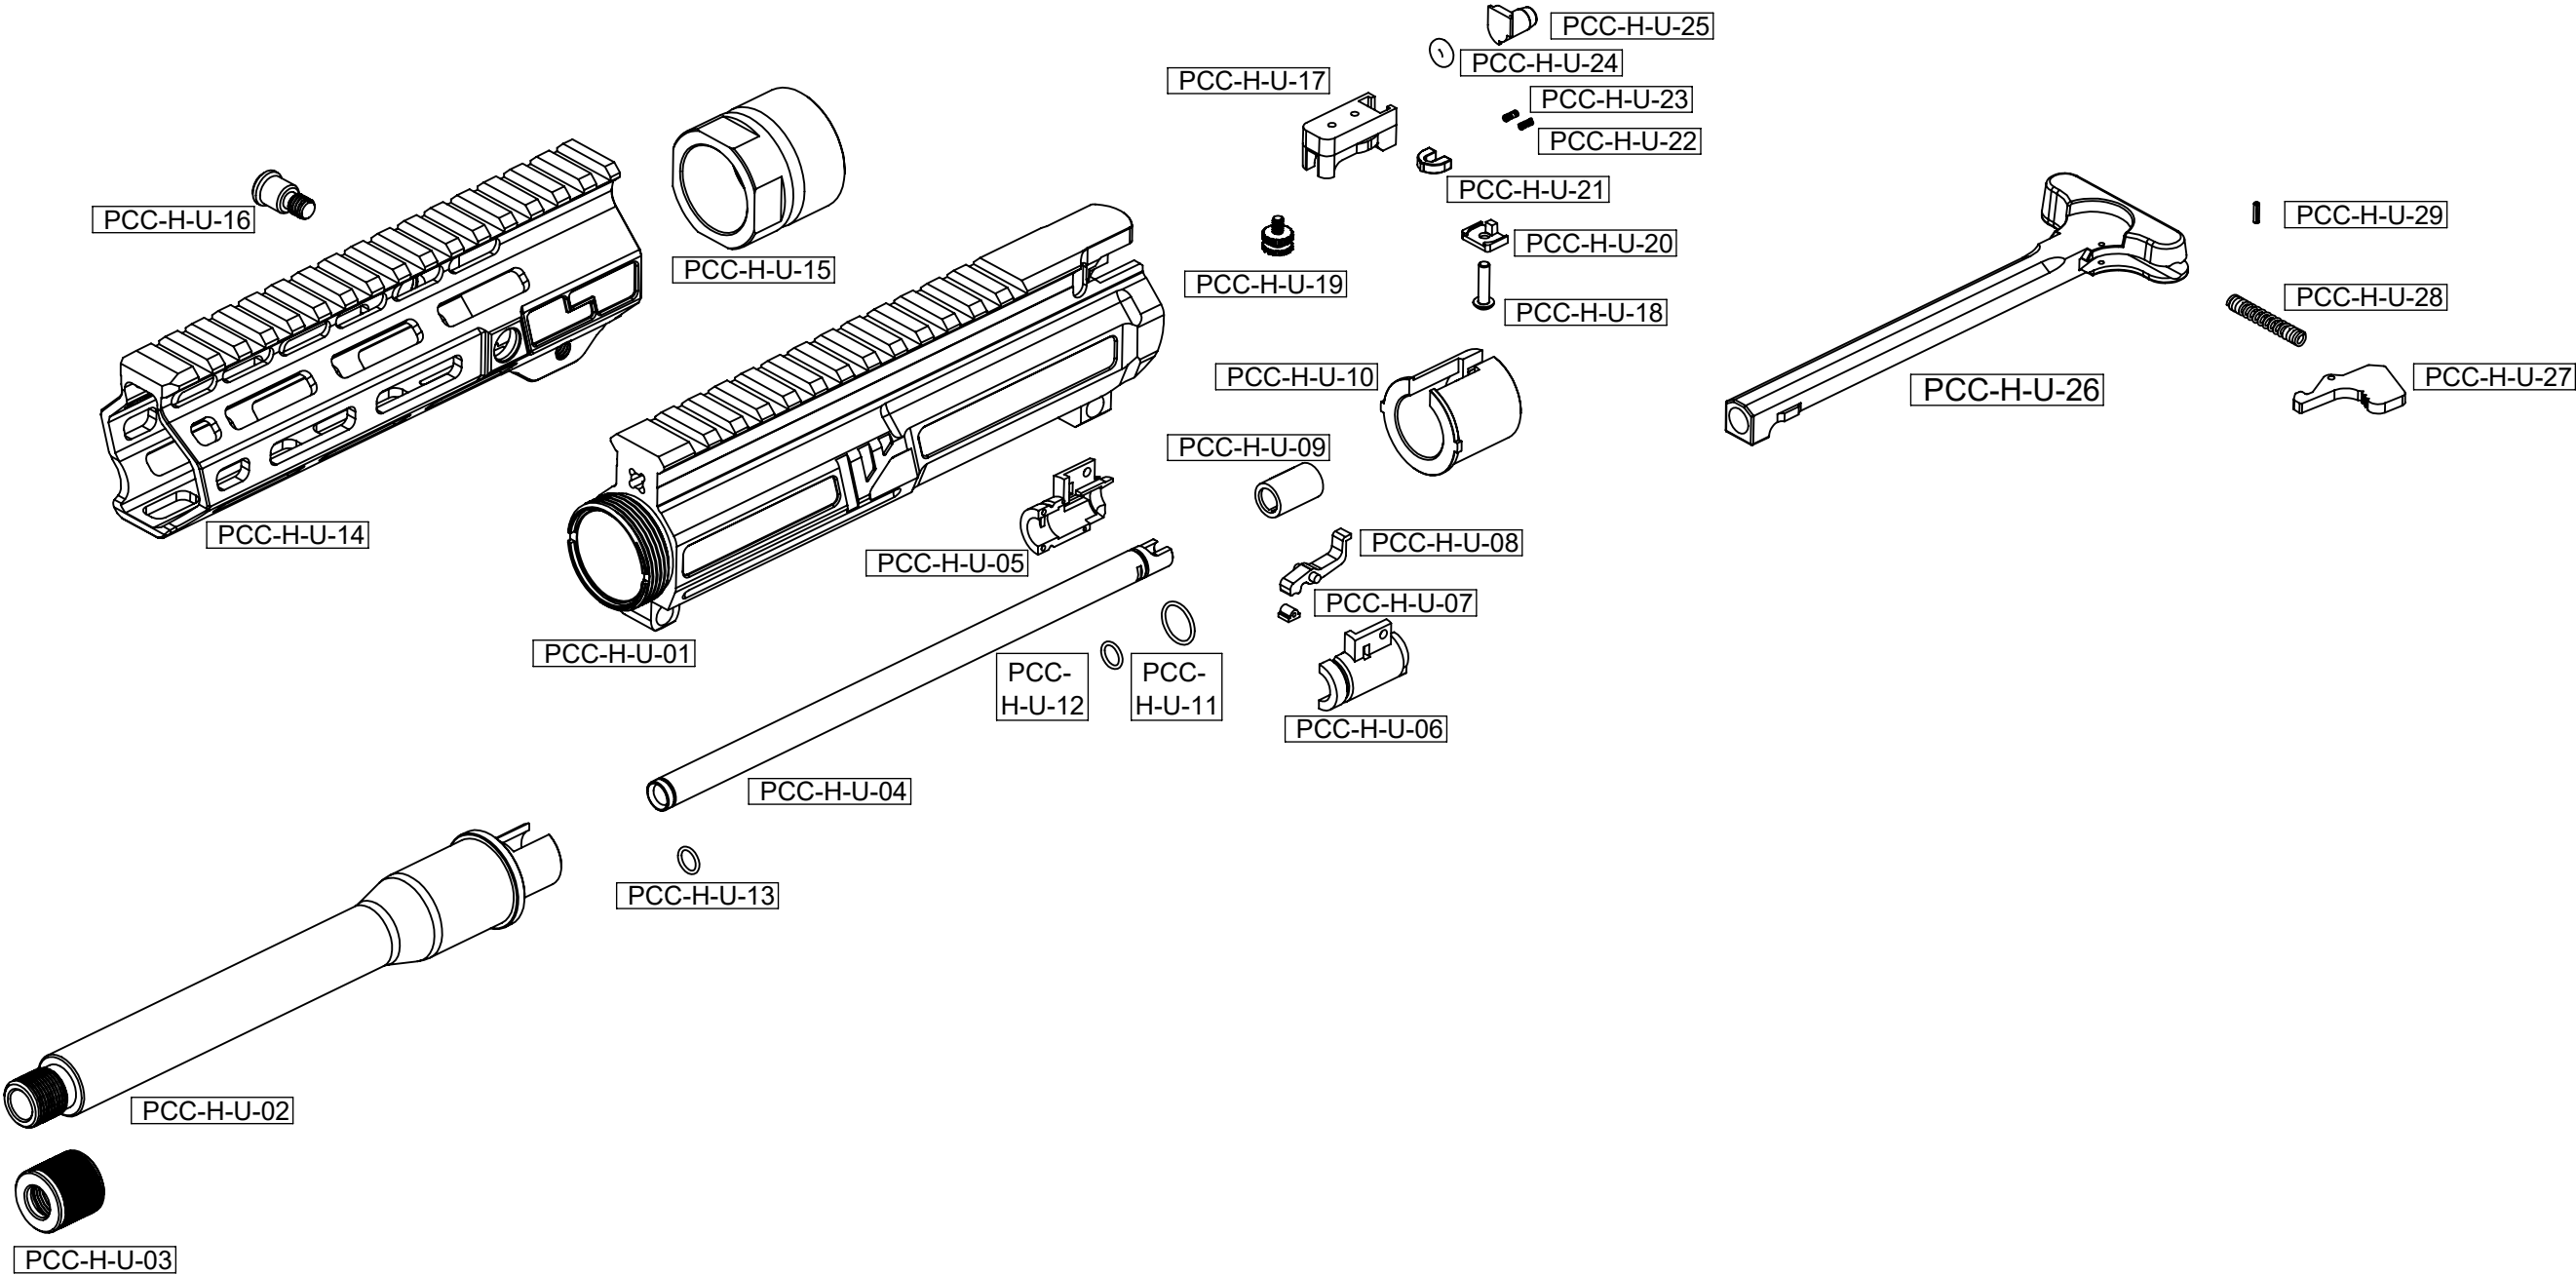[illegible]


SA-PCC-H Lower Receiver Exploded View

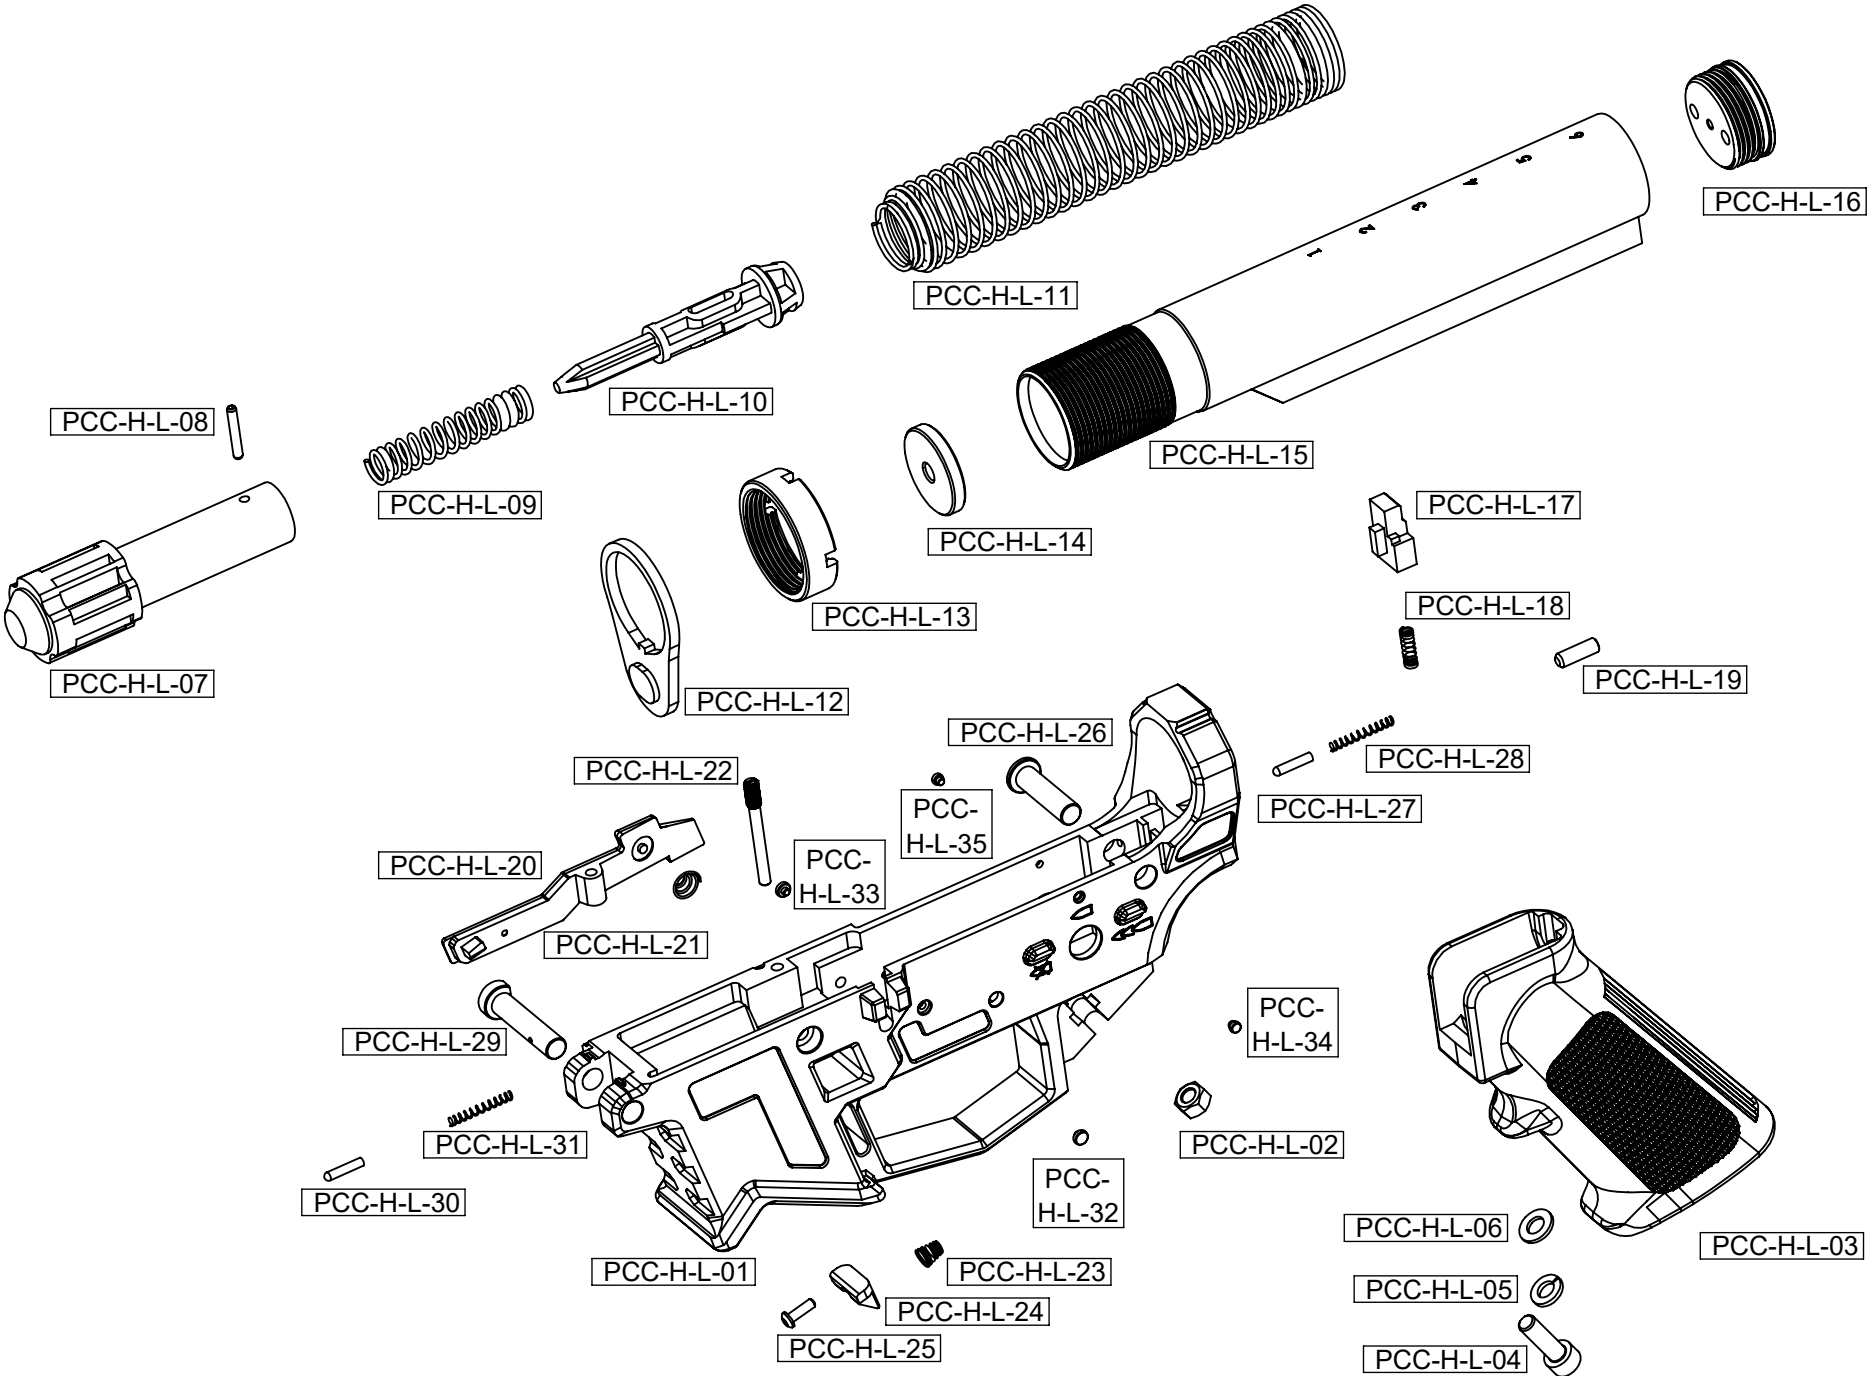[illegible]

SA-PCC-H Bolt Carrier Group Exploded View

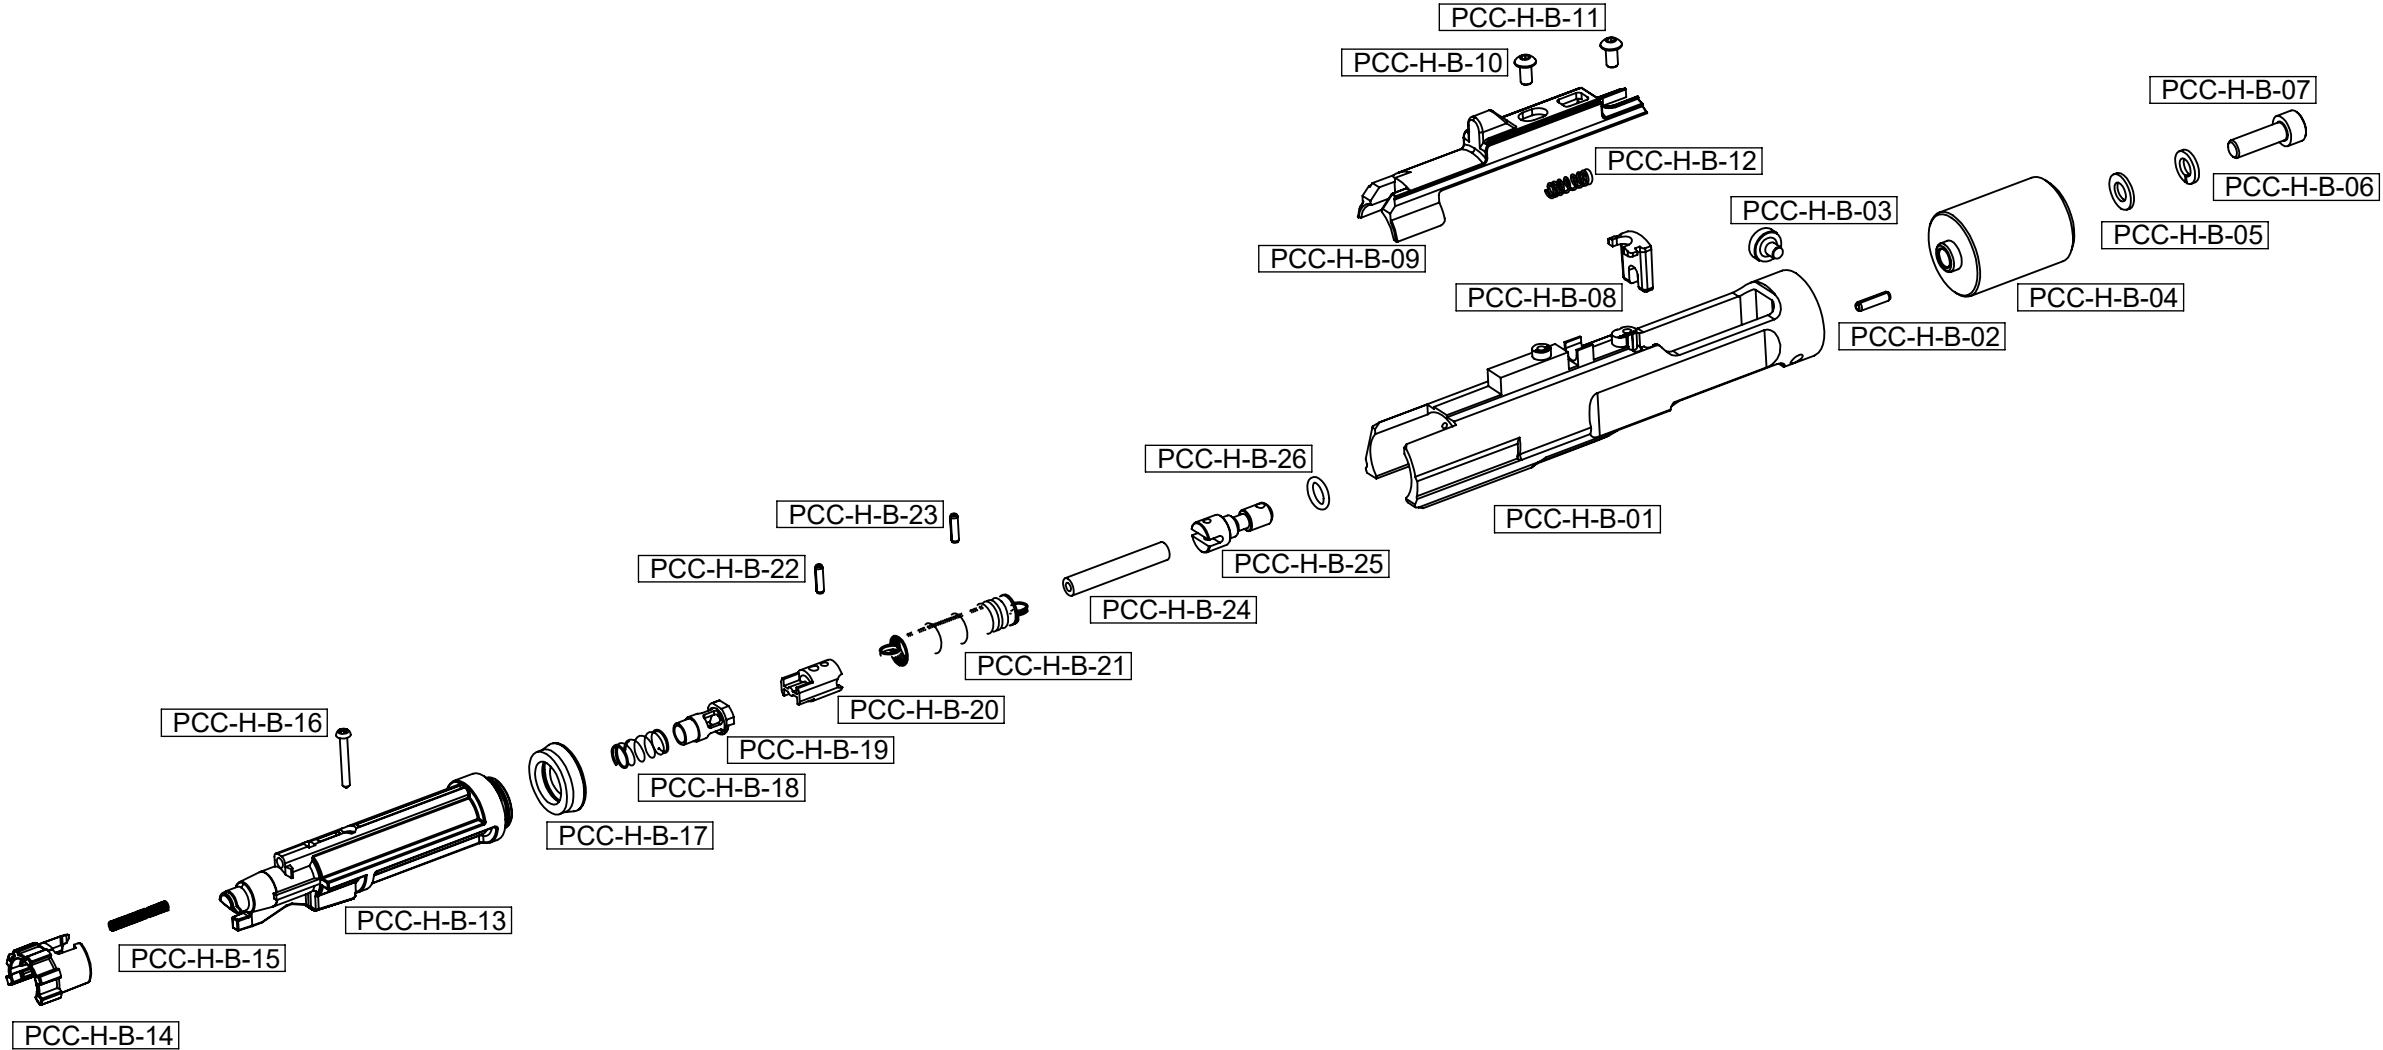[illegible]

SA-PCC-H Trigger Box Exploded View

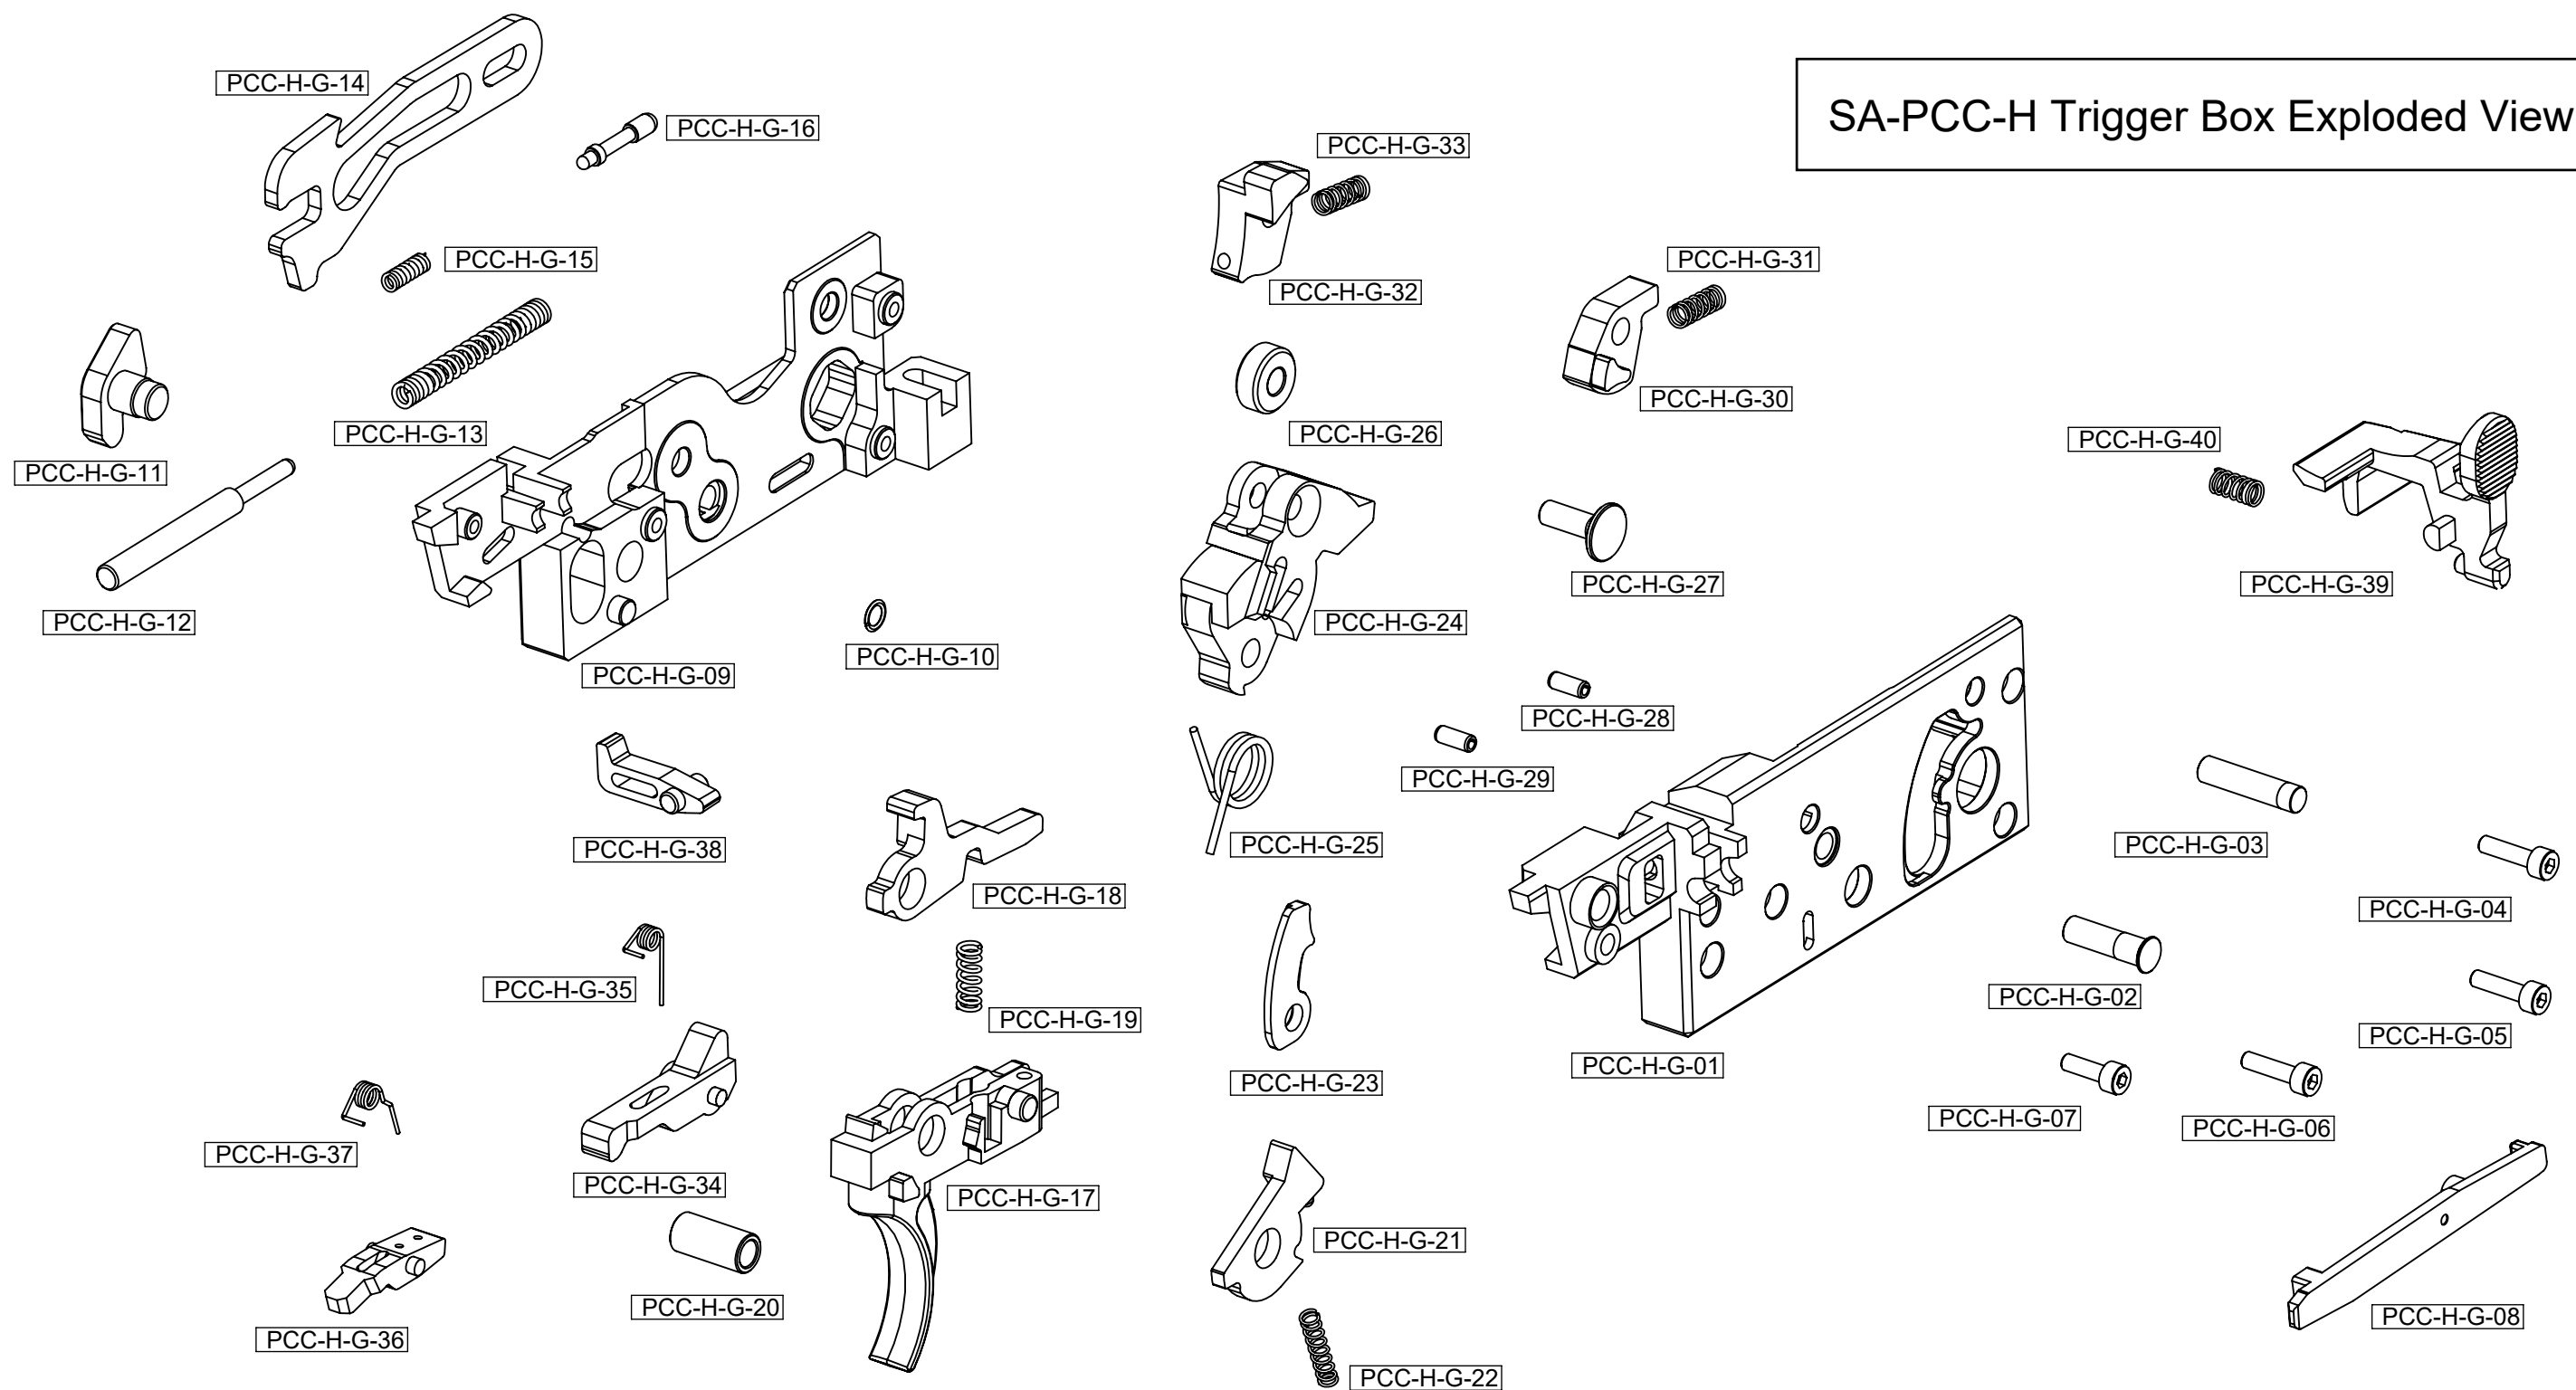[illegible]